


Specialties: Protective Film 55 SW

- GENERAL INTRODUCTION
- PRODUCT DESCRIPTION
- TYPICAL APPLICATION
- RESISTANCE
- SHELF LIFE

Specialties

- is a range of high technology self-adhesive products, developed for specific industrial applications, particularly in the medical, optical or security fields, etc.

Protective Film 55 SW is a 55µ white PP film coated on one side with a clear, permanent solvent based acrylic pressure-sensitive adhesive.

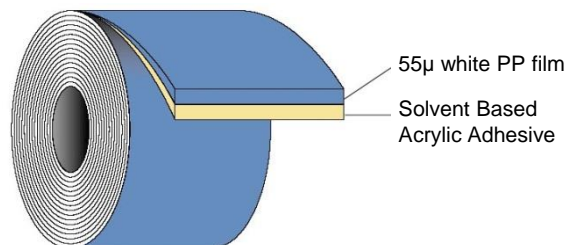

Short-term protection film to be applied on very specific and difficult surfaces such as powder varnished, grained etc...

Resistant to short contact with water, detergents, alcohol and some aliphatic solvents. Not recommended for use in contact with ketones, esters, chlorinated and aromatic hydrocarbons. *For further technical advice, please consult with MACtac.*

2 years when stored at 15/25° C and ± 50 % relative humidity.

ADHESIVE DATA

	Typical Values (*)	Test Method
Quick Tack (N/25mm) ON brushed stainless steel (ref. Nokoro 304 poli. N°4)	16	FTM 9
Peel 180° - (N/25mm) ON brushed stainless steel (ref. Nokoro 304 poli. N°4) - after 20 minutes	18	FTM 1 (ASTM D 903-49)
Shear on brushed stainless steel (hours) (ref. Nokoro 304 poli. N°4) 1kg – 25mmx25mm	> 500	FTM 8

TEMPERATURE RESISTANCE

Minimum Application Temperature	+ 5°C to + 40°C
End-use temperature range	- 30°C to + 70°C

For temperatures outside those quoted above, please consult with MACtac.

THICKNESS
(Carrier + adhesive)

86 μ	ISO 534
------	---------

(*) Values given are typical and are not necessarily for use in specifications.

IMPORTANT NOTICE

All MACtac products are subject to careful quality control throughout the manufacturing process and are warranted to be of merchantable quality and free from manufacturing defects. Published information concerning MACtac products are based upon research which the Company believes to be reliable but such information do not constitute a warranty. Because of the variety of possible uses for MACtac products and the continuing development of new uses, the purchaser should carefully consider the fitness and performance of the product for each intended use and the purchaser assumes all risks in connection with such use. Seller shall not be liable for damages in excess of the purchase price of the product or for incidental or consequential damages. All specifications are subject to change without prior notice.

